

Specifications

Model	GTH™-4016 R	
Measurements	Metric	Imperial
Lifting height maximum with outriggers	15.42 m	50 ft 7 in
Lifting height maximum without outriggers	15.31 m	50 ft 3 in
Lifting capacity maximum	4,000 kg	8,818 lbs
Lift capacity at maximum height	2,500 kg	5,511 lbs
Lift capacity at maximum reach	700 kg	1,543 lbs
Forward reach maximum	13.35 m	43 ft 10 in
Reach at maximum height	3.40 m	11 ft 2 in
A Height	2.99 m	9 ft 10 in
B Height at steering wheel	2.22 m	7 ft 3 in
C Width	2.40 m	7 ft 10 in
D Cab width	93 cm	3 ft
E Track	1.95 m	6 ft 5 in
F Wheelbase	3.00 m	9 ft 10 in
G Length at front wheels	4.66 m	15 ft 3 in
H Length at fork-holder plate	6.76 m	22 ft 2 in
I Ground clearance	34 cm	1 ft 1 in
L Overall width, outriggers extended	3.64 m	11 ft 11 in
M Side rear overhang	2.60 m	8 ft 6 in
N Side front overhang	4.16 m	13 ft 8 in
O Overall length	7.96 m	26 ft 1 in
a1 Obstruction angle		31°
a2 Departure angle		31°

Productivity

Inside/outside turning radius	1.97 m/4.12 m	6 ft 6 in/13 ft 6 in
Break-out force*	5,900 kg	13,007 lbs
Towing capacity at dynamometer**	6,900 kg	15,212 lbs
Drive speed max.	35 km/h	22 mph
Fork-holder plate rotation		138°
Tyres (DIN 70361)	18-19.5" PR16 10 holes wheel disc	
Lifting/lowering speed**	14 sec./9 sec.	
Extension/retraction speed**	28 sec./22 sec.	

Power


Engine	Perkins 1104 D-44T 4-cylinder turbo diesel 99 hp (74 kW), stage III	
Transmission	Hydrostatic variable displacement pump linked to variable displacement motor. 2-speed mechanical gearbox.	
Service pumps	Boom & control system gear pump type: 280 Bar, 88L/min.	
Petrol tank capacities	205 L	45 gal
Engine oil capacities	11.5 L	2.5 gal
Hydraulic oil tank capacities	220 L	48 gal

Weight*** 12,900 kg 28,439 lbs

Standards Compliance

EU Machinery Directive 2006/42/EC
 Operating cab conforms to ISO3471 (ROPS) and ISO3449 (FOPS)
 Low emission engine conforms to EU Directive 97/68/EC Stage III and 2004/26/EC
 Noise emission conforms to EU Directive 2000/14/EC (LpA=74 dB, LwA=103dB)
 Vibration levels according to EN13059:2002 (hand-arm <2.5m/s², whole body 0.35m/s²)

Measurements

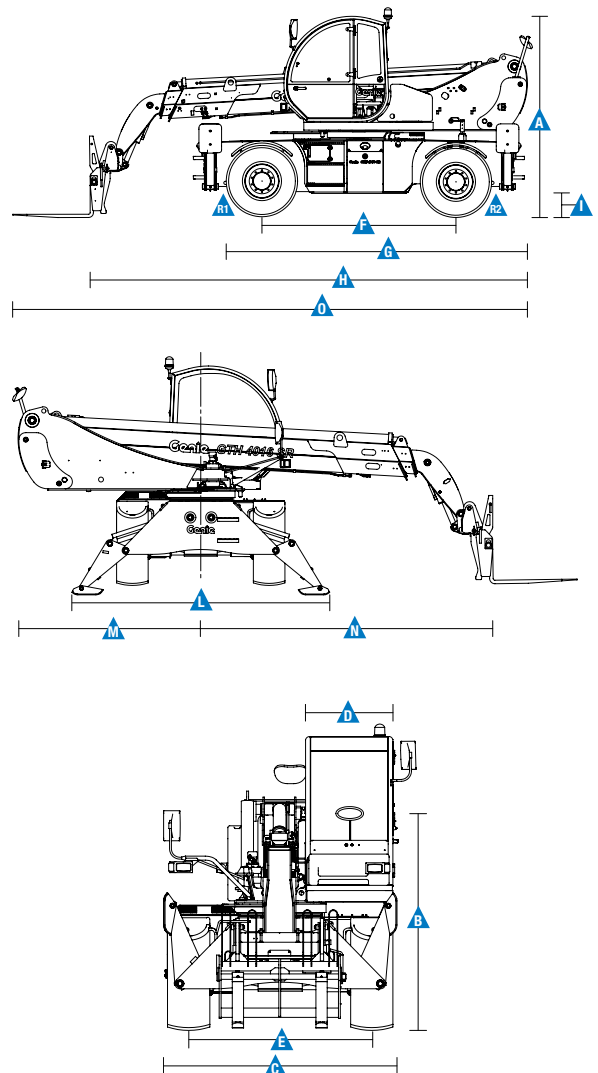


* With 800 L shovel SAE J 732/80

** Without load


*** Weight will vary depending on options and/or country standards

Load Charts


On wheels with forks

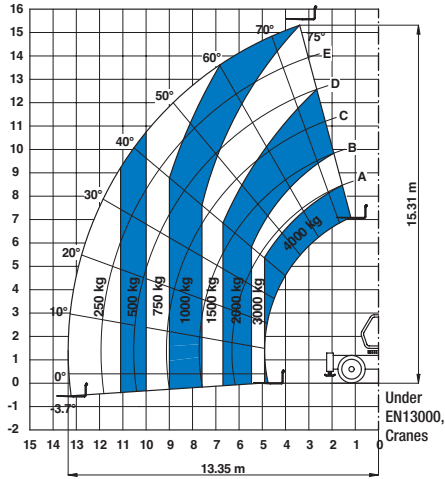


On outriggers with forks

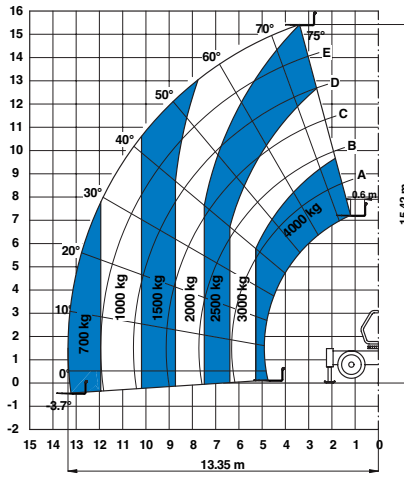


On wheels with 800 L shovel

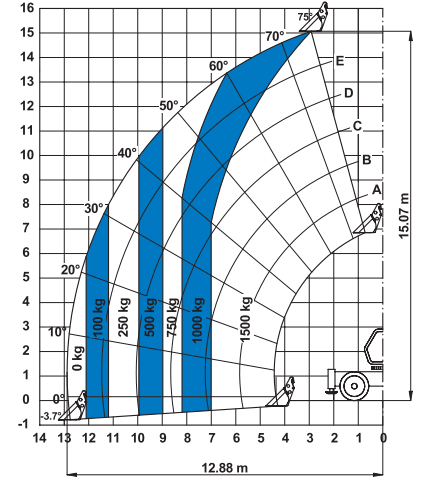


On outriggers with 5t fixed hook on plate

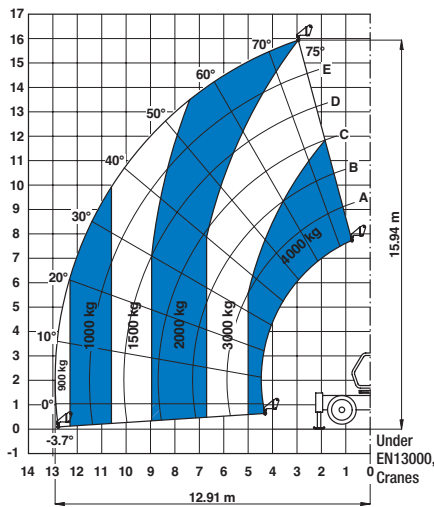


On outriggers with 2m jib (mechanical)

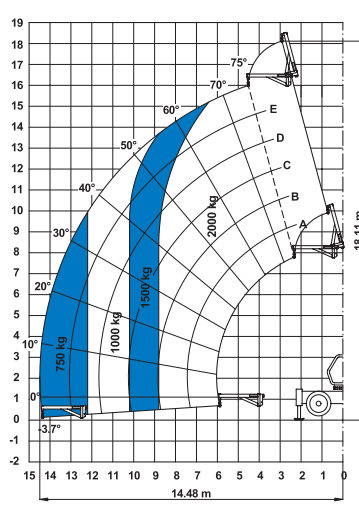


On outriggers with 4m jib (mechanical/hydraulic)

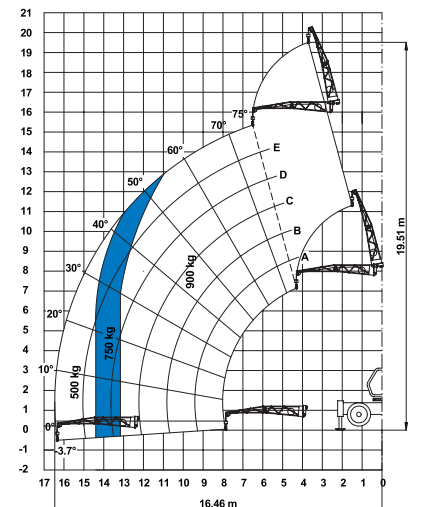


On outriggers with 3t hydraulic hoist

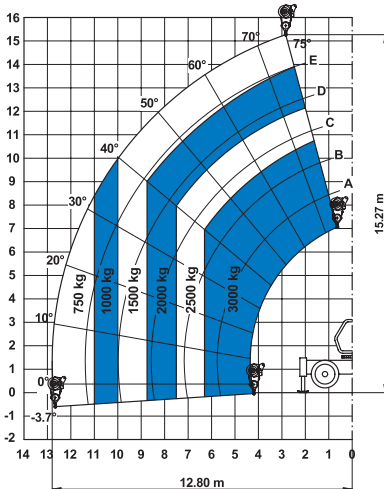

On outriggers with fixed work platform

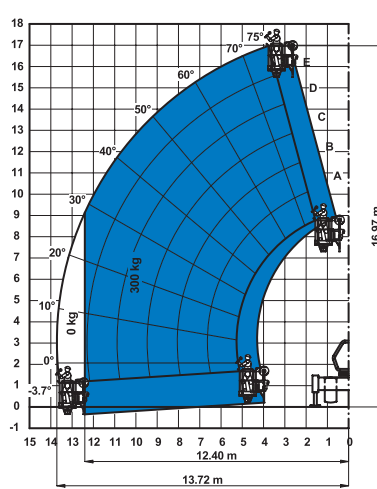


On outriggers with rotating extendable work platform


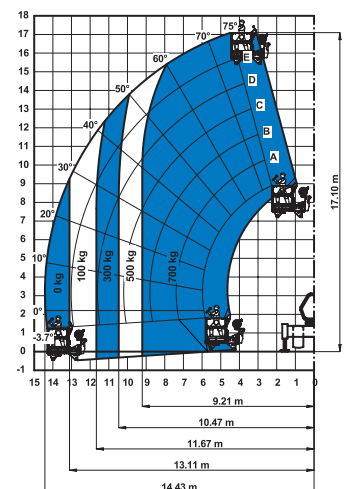



Attachment Options


Dimension References








Fork attachments

	Part Number	Description	Payload	Width	Length	Height	Weight
	55.0750.0052	Floating forks	4,000 kg	1,380 mm	1,615 mm	1,260 mm	395 kg
	55.0750.0055	FEM 3 plate and forks kit	4,000 kg	1,390 mm	1,620 mm	1,175 mm	410 kg
	59.0601.5004	Hydraulic FEM 3 forks side-shift +/- 100 mm	4,000 kg	1,370 mm	1,700 mm	1,180 mm	545 kg



Bucket and shovel attachments

	Part Number	Description	Width	Length	Height	Weight	Hyd. flow max.
	59.0201.9001	800 L loading shovel	2,435 mm	1,170 mm	1,140 mm	510 kg	
	59.0400.0000	500 L concrete bucket manual discharge	1,110 mm	1,110 mm	1,320 mm	230 kg	
	59.0400.1000	500 L concrete bucket hydraulic discharge	1,110 mm	1,110 mm	1,320 mm	244 kg	65/250 lt/min/bar
	59.0400.2000	800 L concrete bucket manual discharge	1,110 mm	1,110 mm	1,520 mm	250 kg	
	59.0400.3000	800 L concrete bucket hydraulic discharge	1,110 mm	1,110 mm	1,520 mm	264 kg	60/220 L/min/bars
	59.0401.2002	500 L concrete mixing bucket full hydraulic	1,000 mm	1,650 mm	900 mm	550/1,850 kg	
	59.0400.7000	Brick holder basket	800 mm	1,110 mm	1,150 mm	120 kg	

Handling and lifting attachments

	Part Number	Description	Payload	Width	Length	Height*	Weight
	59.0700.9002	5T fixed hook on plate	3,000 kg	1,335 mm	830 mm	1,071/1,115 mm	160 kg
	59.0802.3007	2m/1250 kg mechanical jib	2,000 kg	1,335 mm	2,290 mm	800/1,080 mm	255 kg
	59.0802.3008	4m/900 kg mechanical jib	900 kg	1,190 mm	4,450 mm	980/1,130 mm	245 kg
	59.0802.3009	4m/900 kg hydraulic jib	900 kg	1,190 mm	4,450 mm	980/1,130 mm	250 kg
	59.0901.9002	3T hydraulic hoist	3,000 kg	1,335 mm	830 mm	1,840/1,120 mm	350 kg

Work platform attachments

	Part Number	Description	Payload	Width**	Length	Height	Weight
	59.1111.6002	Rotating and extendable +/-90° 3 persons max.	700 kg	2,520 mm up to 4,700 mm	2,110 mm	1,850 mm	920 kg
	59.1111.6005	Fixed non extendable 2 persons max.	300 kg	2,300 mm	1,490 mm	1,710 mm	400 kg

* Legs folded up/down
** Stowed/extended

Features

Standard Features

Measurements

- 4,000 kg (8,818 lb) maximum lift capacity
- 15.42 m (50 ft 7 in) maximum lift height
- 13.35 m (43 ft 10 in) maximum forward reach

Productivity

- 4 x 4
- 4 - wheel steer
- 3 steering modes:
 - front wheel steer
 - crab steer
 - coordinated steer
- Hydraulic line on boom
- Electrical line on boom
- Power assisted steering
- Front and rear outriggers
- 400° rotation (200° left, 200° right)
- Hydrostatic transmission with variable displacement pump and motor linked with 2-speed mechanical gearbox
- Multifunction electro-proportional 5x1 joystick
- Limited slip differential on front axle
- Attachment holder plate – mechanical coupling
- Two-section door (glass upper/steel lower)
- Angle and length indicators on boom correspond to load charts
- Adjustable suspended seat with operator detection seat contact switch
- Battery disconnection switch
- Adjustable steering wheel
- Front & rear windscreen wipers
- Sunshield

Standard Features

- Roof protection grid
- Two side view mirrors & rear fish eye mirror
- Front & rear lights
- Side mounted engine for easy access to components
- Oil immersed, multi-disc brakes on both axles
- Lockable fuel tank
- Lockable storage box
- Maintenance collar
- Rear wheels alignment system
- Road/jobsite/work-platform switch
- Stability and load control system:
 - Load moment indicator with LEDs
 - Audible alarm
 - Automatic lock-out of boom extension and lowering
 - Automatic lock-out of stabilisers
 - Automatic lock-out of rear axle

Power

- Perkins turbo diesel 98 hp (74 kW), stage IIIA
- Perkins turbo diesel 111 hp (83 kW), stage IIIB

Tyres

- 18-19.5" PR16. 10 holes wheel disc (DIN 70361)

Options & Accessories

Productivity

- Air conditioning
- Additional electrical line with cable reel on boom
- Additional hydraulic line on boom
- Hydraulic quick coupling for attachments
- Adjustable spotlight on boom/cabin
- Windshield protection grid
- Wiper on cabin roof
- Trailer coupling
- Outriggers extension plates
- Biodegradable hydraulic oil
- 10 t hydraulic jack + 24 mm box wrench
- Left hand joystick
- Radio remote control
- Concrete mixing bucket pre-arrangement
- Work platform attachment pre-arrangement
- Electric line on boom
- 360° Continuous rotation
- Chassis leveling +/- 7°
- Track and trace
- Comfortable seat/ergonomic armrest
- Keypad unlocking device
- Visible and audible crane warning light on cabin roof
- 12 V charger
- Radio MP3

Tyres and Wheels

- Foam filled tyre 18-19.5" PR16
- Spare wheel 18-19.5" PR16
- Spare wheel foam filled tyres 18-19.5" PR16

Attachments

- Floating forks L 1200 mm, section 120x50 mm
- Floating forks L 1200 mm, section 100x65 mm (UK only)
- FEM 3 plate and forks kit
- FEM 3 forks with hydraulic side-shift (+/-100 mm)
- 800 L loading shovel
- 500/800 L concrete bucket (manual or hydraulic discharge)
- 500 L concrete mixing bucket (full hydraulic)
- Brick-holder basket
- Fixed hook on plate
- 2 m mechanical extension jib, 2,000 kg capacity
- 4 m mechanical or hydraulic extension jib, 900 kg capacity
- 4 t hydraulic winch
- Fixed work platform
- Rotating and extendable work platform

07/15. Part No. B108033UK

