Scissor Lift

読品・

UpRight 💥 3 2 N

×

UpRight -

0

Upright POWERED ACCESS

- Working height up to 11.8m
- Manoeuvres easily with
 tight inside turning radius
- Electronic motor controller
 for smooth, quiet operation
- Fully proportional one-hand controls
- Steel deck with slip-resistant surface
- Platform material loading system
- Non-marking tyres



X26/X32 scissor lift specifications

	X26N*	X26	X32
max. working height A	10.0m	10.0m	11.8m
max. platform height B	7.93m	7.93m	9.75m
max. drive height	7.93m	7.93m	9.75m
platform capacity (SWL)	340kg	454kg	340kg
platform size	0.71m x 3.2m	1.17m x 3.2m	1.17m x 3.2m
- inside with deck extended			
width c	0.83m	1.22m	1.22m
stowed height D	2.12m	2.12m	2.25m
- with guardrails lowered	1.99m	1.99m	1.88m
stowed length E	2.35m	2.35m	2.35m
gross weight	2,358kg	2,153kg	2,486kg
drive speed max.	3.2km/h	3.2km/h	3.2km/h
- with platform raised	0.8km/h	1.0km/h	1.0km/h
gradeability	14.5°/25%	12°/22%	12°/22%
inside turning radius	0.2m	0.2m	0.2m
ground clearance	89mm	89mm	89mm
lift speed - raise / lower	42/40sec	45/40sec	65/40sec
drive system	dual front wheel hydraulic motors		
tyres	381mm dia. solid rubber, non-marking		
battery charger	25A, 110/220V AC		
parking brake	dual, spring-applied hydraulic release		
control system	one-hand proportional joystick		
power source	24V 4hp DC electric m	notor 4 x 6V	220 Ah batteries

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight operators manual for detailed instructions on the proper use and maintenance.

*X26N: Only available in certain territories - check before ordering.






Vigo Centre, Birtley Road, Washington, POWERED ACCESS Tyne & Wear, NE38 9DA, U.K.

Sales Tel: +44 (0) 845 1550 057 • Spare Parts Tel: +44 (0) 845 1550 058

www.upright.com



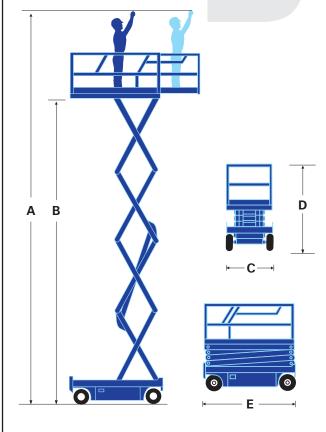

This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

